




# SARK TILE

## BERSE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Non-Rectified	Matte	1/4"	14.25	7	Min. 1/8"
12x12	Porcelain	Mosaic 2x2	Matte	1/4"	6	6	

## BERSE TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥0.42
Water Absorption	ISO 10545-3	E ≤ 0.5%
Breaking Strength	ISO 10545-4	> 1300 N
MOH's Hardness	EN 0	(Graphite) 5 (Grey) 4 (Nocce) 4
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GA
Stain Resistance	ISO 10545-14	5

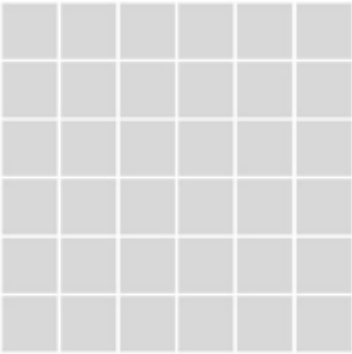

## PRODUCT DESCRIPTION

---

STOCKED IN LINCOLN, NE

### AVAILABLE COLORS

Graphite  
Grey  
Nocce

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

---

### RECOMMENDED INSTALLATIONS

Floor  
Wall  
Exterior

---

### SHARE THIS STYLE

[GENERATE PDF](#)