



## BRIT STONE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Non-Rectified	Matte	3/8"	20.35	10	Min. 1/8"
13x13	Porcelain	Mosaic 2x2	Matte	3/8"	13.2	11	

## BRIT STONE TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Water Absorption	ISO 10545-3	$E \leq 0.5\%$
Breaking Strength	ISO 10545-4	Min. 250
MOH's Hardness	EN 0	5
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	Unaffected
Frost Resistance	ISO 10545-12	Resistant
PEI-Glazed Tiles	ISO 10545-7	4
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	$\geq 0.42$
Shade and Texture Rating	CTDA "V"	V4
Facial Dimensions	ISO 10545-2	Pass
Range of Thickness	ISO 10545-2	Pass
Warpage	ISO 10545-2	Pass
Wedging	ISO 10545-2	Pass



# PRODUCT DESCRIPTION


---


[Home](#) / [Porcelain & Ceramic Tile](#) / Brit Stone







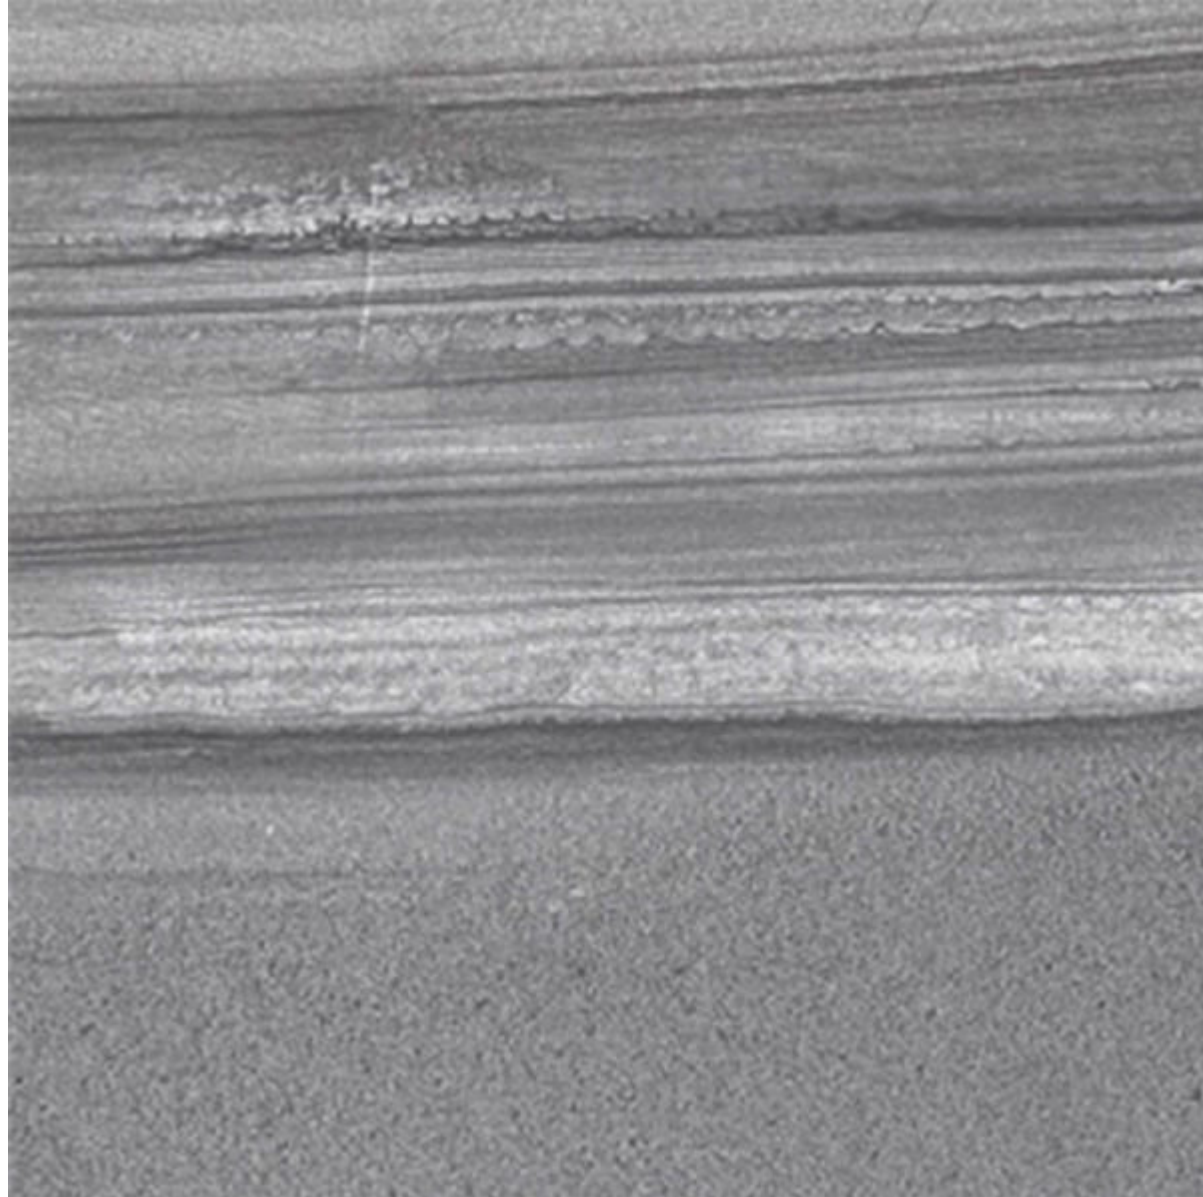



## BRIT STONE

\$0.00

- [Description](#)
- [Additional information](#)

STOCKED IN LINCOLN, NE

### AVAILABLE COLORS

Arena  
Blanco  
Graphite  
Vision

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

## RECOMMENDED INSTALLATIONS

Floor  
Wall  
Exterior

## SHARE THIS STYLE



[GENERATE PDF](#)

## ADDITIONAL INFORMATION

Color	<a href="#">Beige &amp; Cream</a> , <a href="#">Grey</a> , <a href="#">White</a>
Material	<a href="#">Stone</a>
Finish	<a href="#">Glossy</a> , <a href="#">Matte</a>
Price	\$

Brit Stone quantity

Add to cart

SKU: brit stone

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

## BRIT STONE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Non-Rectified	Matte	3/8"	20.35	10	Min. 1/8"
13x13	Porcelain	Mosaic 2x2	Matte	3/8"	13.2	11	

## BRIT STONE TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Water Absorption	ISO 10545-3	$E \leq 0.5\%$
Breaking Strength	ISO 10545-4	Min. 250
MOH's Hardness	EN   0	5
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	Unaffected
Frost Resistance	ISO 10545-12	Resistant
PEI-Glazed Tiles	ISO 10545-7	4
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	$\geq 0.42$
Shade and Texture Rating	CTDA "V"	V4
Facial Dimensions	ISO 10545-2	Pass
Range of Thickness	ISO 10545-2	Pass
Warpage	ISO 10545-2	Pass
Wedging	ISO 10545-2	Pass

## RELATED PRODUCTS



### **CARBONITE**

\$0.00



### **CORK**

\$0.00





## TIVOLI

\$0.00