



## SARKOTILE

### BRIT STONE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
21x21	Porcelain	Non-Rectified	Matte	5/16"	22.28	7	
12x24	Porcelain	Non-Rectified	Matte	5/16"	20.34	10	
8x33 (Blanco, Graphite, Vison)	Porcelain	Non-Rectified	Matte	5/16"	10.58	6	
8x48 (Arena, Blanco)	Porcelain	Rectified	Matte	5/16"	12.46	5	
24x48 (Arena, Blanco, Graphite)	Porcelain	Rectified	Matte	5/16"	15.5	2	
3x12 Bullnose	Porcelain		Matte	5/16"		24	
13x13	Porcelain	Mosaic 2x2	Matte	5/16"	13.15	11	
11.5x17	Porcelain	Mosaic Large Hex	Matte	5/16"	6.78	7	
12x24 (Blanco, Graphite)	Porcelain	Rectified	Glossy	5/16"	15.5	8	
8x48 (Blanco, Graphite)	Porcelain	Rectified	Glossy	5/16"	10.33	4	
24x48 (Blanco, Graphite)	Porcelain	Rectified	Glossy	5/16"	15.5	2	




### BRIT STONE MATTE TILE PERFORMANCE DATA

Physical Properties	ASTM Test	ISO Test	Value Required ANSI	Declared ASTM
Water Absorption	C373	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	C648	ISO-10545/4	>=250	Min. 250
Scratch Hardness	MOH's Scale	EN-101	-	5
Chemical Resistance	C650	ISO-10545/13	Unaffected	Unaffected

Physical Properties	ASTM Test	ISO Test	Value Required ANSI	Declared ASTM
Frost Resistance	C1026	ISO-10545/12	Resistant	Resistant
Group	SEE FAQs	SEE FAQs	-	4
Deep Abrasion - Unglazed Tiles	C1234	ISO-10545/6	<175 mm <sup>3</sup>	-
PEI - Glazed Tiles	C1027	ISO-10545/7	-	4
Minimum Bond Strength (PSI)	C482		>=50 psi	165
Dynamic Coefficient of Friction (DCOF)	A137.1	-	>=0.42	>=0.42
Shade and Texture Rating	CTDA "V"	-	-	V4
Facial Dimensions	C499	ISO-10545/2	1.5% Max	Pass
Range of Thickness	C499	ISO-10545/2	0.040 Max	Pass
Warpage	C485	ISO-10545/2	0.75%	Pass
Wedging	C502	ISO-10545/2	1.0% Max	Pass

## BRIT STONE GLOSSY TILE PERFORMANCE DATA

Physical Properties	ASTM Test	ISO Test	Value Required ANSI	Declared ASTM
Water Absorption	C373	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	C648	ISO-10545/4	>=250	Min. 350
Scratch Hardness	MOH's Scale	EN-101	-	4
Chemical Resistance	C650	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	C1026	ISO-10545/12	Resistant	Resistant
Group	SEE FAQs	SEE FAQs	-	4P
Deep Abrasion - Unglazed Tiles	C1234	ISO-10545/6	<175 mm <sup>3</sup>	-
PEI - Glazed Tiles	C1027	ISO-10545/7	-	4
Minimum Bond Strength (PSI)	C482		>=50 psi	165
Dynamic Coefficient of Friction (DCOF)	A137.1	-	>=0.42	<=0.35
Shade and Texture Rating	CTDA "V"	-	-	V4
Facial Dimensions	C499	ISO-10545/2	1.5% Max	Pass
Range of Thickness	C499	ISO-10545/2	0.040 Max	Pass
Warpage	C485	ISO-10545/2	0.75%	Pass
Wedging	C502	ISO-10545/2	1.0% Max	Pass

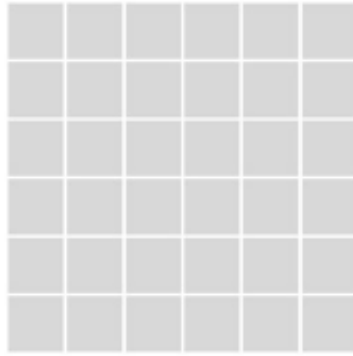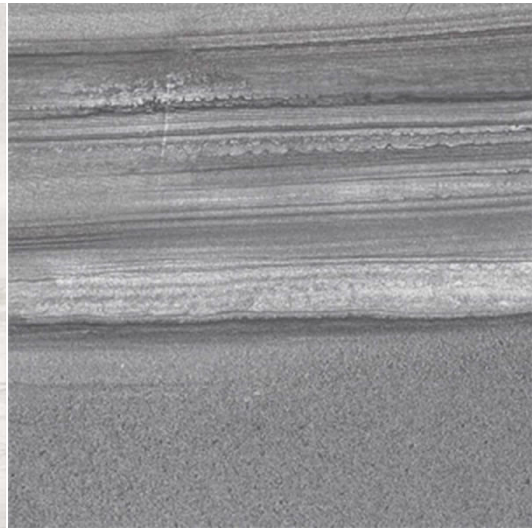

## PRODUCT DESCRIPTION

---

**1-2 WEEK LEAD TIME**

**AVAILABLE COLORS**

Arena  
Blanco  
Graphite  
Vision

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

---

**RECOMMENDED INSTALLATIONS**

Floor  
Wall

**SHARE THIS STYLE**

[GENERATE PDF](#)