




SARKOTILE

SWERTE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
8x45	Porcelain	Rectified	Matte	3/8"	12.5	5	Min. 1/16"

CALCO TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	
Water Absorption	ISO 10545-3	<0,5%
Breaking Strength	ISO 10545-4	>35N/mm2
MOH's Hardness	EN 0	MOHS 4
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GA GHA
Stain Resistance	ISO 10545-14	Class 5

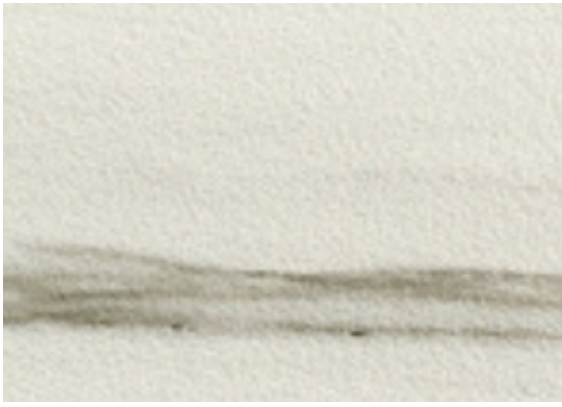

PRODUCT DESCRIPTION

STOCKED IN LINCOLN, NE

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

RECOMMENDED INSTALLATIONS

Wall
Floor
Exterior

SHARE THIS STYLE

[GENERATE PDF](#)