





## CANTE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended	Grout Joint
12x24	Porcelain	Non-Rectified	Matte	3/8"	15.49	8		
12x12	Porcelain	Mosaic 2x2	Matte	3/8"	9.69	10		
3x24	Porcelain		Matte	3/8"				

## FIFTH AVENUE TILE PERFORMANCE DATA


Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	$\geq 0.42$
Water Absorption	ANSI A137.1	$\leq 0.5\%$
Resistance to freeze/thaw cycling	ASTM C1026	Resistant
Warpage (diagonal)	Warpage $\pm 0.4\%$ or $\pm 0.07$ in.	Comply with ANSI A137.1
Warpage (edge)	Warpage $\pm 0.4\%$ or $\pm 0.05$ in.	Comply with ANSI A137.1
Chemical Resistance (Acid & Bases) (Household Chemicals)	ASTM C650	Unaffected
Thickness	ASTM C499	Comply with ANSI A137.1
Wedging	$\pm 0.25\%$ or $\pm 0.03$ in	Comply with ANSI A137.1


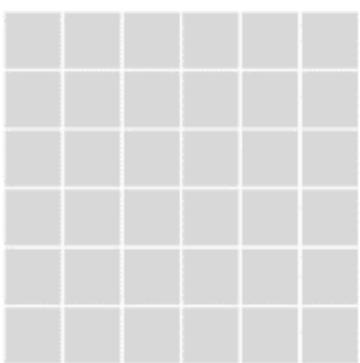


## PRODUCT DESCRIPTION

---

[Home](#) / [Porcelain & Ceramic Tile](#) / Fifth Avenue

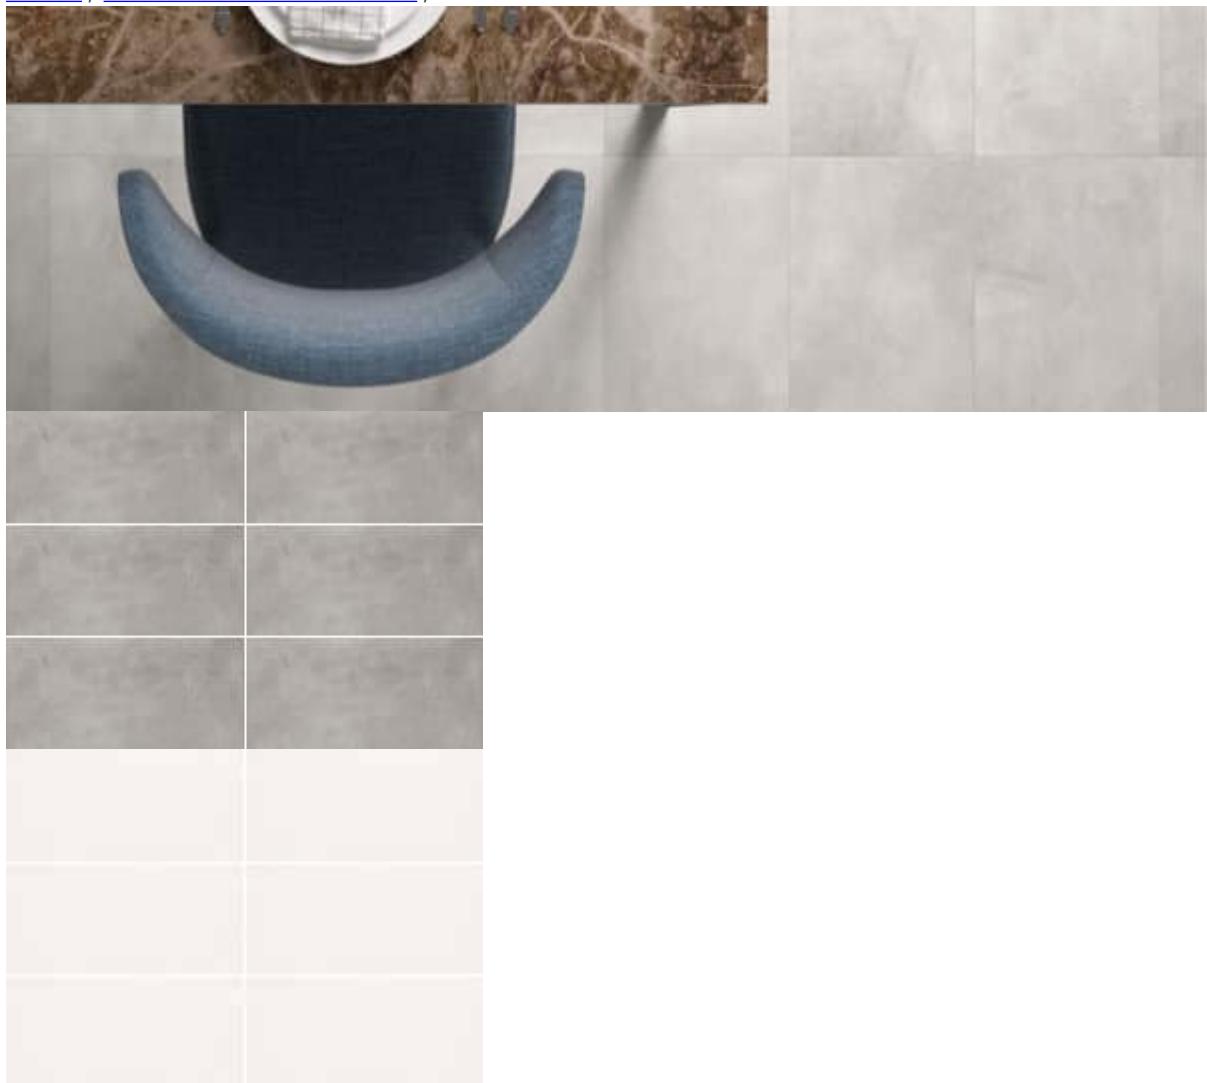



## FIFTH AVENUE

\$0.00

- [Description](#)
- [Additional information](#)

1-2 WEEK LEAD TIME

### AVAILABLE COLORS

Concrete  
White

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

---

### RECOMMENDED INSTALLATIONS

Wall  
Floor  
Exterior

---

### SHARE THIS STYLE



[GENERATE PDF](#)

## ADDITIONAL INFORMATION

Color	Brown, Gray, Black, White
Material	Wood, Stone, Concrete, Decorative, 3D Wall
Price	\$
Color	<a href="#">Grey</a> , <a href="#">White</a>
Material	<a href="#">Concrete</a>

Fifth Avenue quantity

1

Add to cart

SKU: fifth-avenue

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

## CANTE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Non-Rectified	Matte	3/8"	15.49	8	
12x12	Porcelain	Mosaic	2x2	Matte	3/8"	9.69	10
3x24	Porcelain		Matte	3/8"			

## FIFTH AVENUE TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥ 0.42
Water Absorption	ANSI A137.1	≤ 0.5%
Resistance to freeze/thaw cycling	ASTM C1026	Resistant
Warpage (diagonal)	Warpage ± 0.4% or ± 0.07 in.	Comply with ANSI A137.1
Warpage (edge)	Warpage ± 0.4% or ± 0.05 in.	Comply with ANSI A137.1
Chemical Resistance (Acid & Bases) (Household Chemicals)	ASTM C650	Unaffected
Thickness	ASTM C499	Comply with ANSI A137.1
Wedging	± 0.25% or ± 0.03 in	Comply with ANSI A137.1

## RELATED PRODUCTS



### TIVOLI

\$0.00

MORBIER  
RACLETTE  
COMTE  
BEAUFORT  
TOMME DES ALP



## MONACO

\$0.00



## BEACHWOOD

\$0.00