

CANTE AVAILABLE SIZES


| H | Sizes | Type | Style | Finish | Thickness | Sqft/Carton | Pieces/Box | Recommended Grout Joint |
|---|-------|-----------|---------------|--------|-----------|-------------|------------|-------------------------|
| | 12x24 | Porcelain | Non-Rectified | Matte | 3/8" | 15.49 | 8 | |
| | 12x12 | Porcelain | Mosaic 2x2 | Matte | 3/8" | 9.69 | 10 | |
| | 3x24 | Porcelain | | Matte | 3/8" | | | |


FIFTH AVENUE TILE PERFORMANCE DATA

| Physical Properties | Standard | Results |
|--|------------------------------|-------------------------|
| Dynamic Coefficient of Friction | D.C.O.F. > 0.42 | ≥ 0.42 |
| Water Absorption | ANSI A137.1 | ≤ 0.5% |
| Resistance to freeze/thaw cycling | ASTM C1026 | Resistant |
| Warpage (diagonal) | Warpage ± 0.4% or ± 0.07 in. | Comply with ANSI A137.1 |
| Warpage (edge) | Warpage ± 0.4% or ± 0.05 in. | Comply with ANSI A137.1 |
| Chemical Resistance (Acid & Bases) (Household Chemicals) | ASTM C650 | Unaffected |
| Thickness | ASTM C499 | Comply with ANSI A137.1 |
| Wedging | ± 0.25% or ± 0.03 in | Comply with ANSI A137.1 |



PRODUCT DESCRIPTION

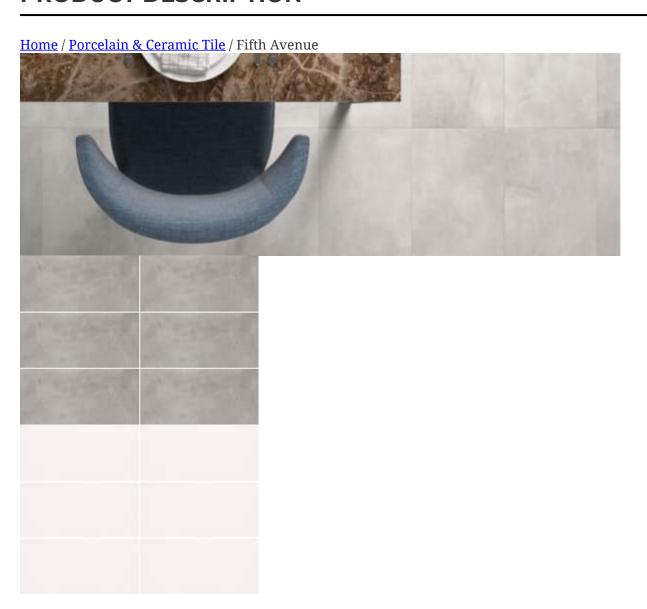



FIFTH AVENUE

\$0.00

- <u>Description</u>
- Additional information

1-2 WEEK LEAD TIME

AVAILABLE COLORS

Concrete White

Please contact the office for availability. 402-475-1300

RECOMMENDED INSTALLATIONS

Wall Floor Exterior

SHARE THIS STYLE



GENERATE PDF

ADDITIONAL INFORMATION

Color Brown, Gray, Black, White

Material Wood, Stone, Concrete, Decorative, 3D Wall

Price

ColorGrey, WhiteMaterialConcrete



Add to cart

SKU: fifth-avenue

Categories: Porcelain & Ceramic Tile, Trade Professionals

CANTE AVAILABLE SIZES

| Sizes | Type | Style | Finish | Thickness | Sqft/Cartor | Pieces/Box | Recommended Grout Joint |
|-------|--------------|-------------|---------|-----------|-------------|------------|--------------------------------|
| 12x24 | Porcelain No | n-Rectified | l Matte | 3/8" | 15.49 | 8 | |
| 12x12 | Porcelain Mo | saic 2x2 | Matte | 3/8" | 9.69 | 10 | |
| 3x24 | Porcelain | | Matte | 3/8" | | | |

FIFTH AVENUE TILE PERFORMANCE DATA

| Physical Properties | Standard | Results |
|-----------------------------------|--------------------------------------|-------------------------|
| Dynamic Coefficient of Friction | D.C.O.F. > 0.42 | ≥ 0.42 |
| Water Absorption | ANSI A137.1 | ≤ 0.5% |
| Resistance to freeze/thaw cycling | ASTM C1026 | Resistant |
| Warpage (diagonal) | Warpage \pm 0.4% or \pm 0.07 in. | Comply with ANSI A137.1 |
| Warpage (edge) | Warpage \pm 0.4% or \pm 0.05 in. | Comply with ANSI A137.1 |
| Chemical Resistance | | |
| (Acid & Bases) | ASTM C650 | Unaffected |
| (Household Chemicals) | | |
| Thickness | ASTM C499 | Comply with ANSI A137.1 |
| Wedging | ± 0.25% or ± 0.03 in | Comply with ANSI A137.1 |

RELATED PRODUCTS



SARK STEEL

\$0.00



COLORADO

\$0.00



BRICK

\$0.00