



GEO AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
7x8 (Blanco, Carrara, Gris)	Porcelain	Hexagon	Matte	3/8"	11	35	Min. 5/64"
3.6x8.2 (Gris, Negro, Blanco)	Porcelain	Chevron	Matte	3/8"	11	54	Min. 5/64"
3.6x8.2 (Blanco)	Porcelain	Chevron	Glossy	3/8"	11	54	Min. 5/64"

GEO HEXAGON TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥ 0.42
Water Absorption	ISO 10545-3	< .05%
Breaking Strength	ISO 10545-4	> 1300 N
MOH's Hardness	EN 0	7
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA
Stain Resistance	ISO 10545-14	5

GEO CHEVRON MATTE TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥ 0.42
Water Absorption	ISO 10545-3	< 0.5%
Breaking Strength	ISO 10545-4	> 1300 N
MOH's Hardness	EN 0	7
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA
Stain Resistance	ISO 10545-14	5

GEO CHEVRON GLOSSY TILE PERFORMANCE DATA


Physical Properties	Standard	Results
Water Absorption	ISO 10545-3	> 10%


Breaking strength	ISO 10545-4	600 N
MOH's Hardness	EN 0	3
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GHB GA
Stain Resistance	ISO 10545-14	5



PRODUCT DESCRIPTION

[Home](#) / [Porcelain & Ceramic Tile](#) / [Geo](#)

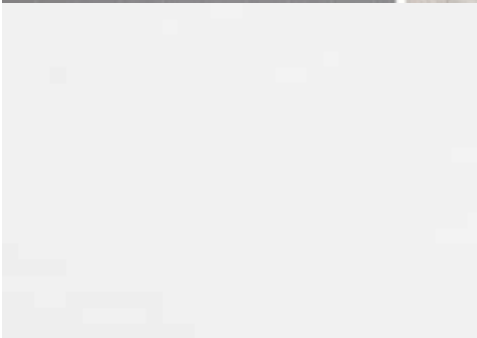

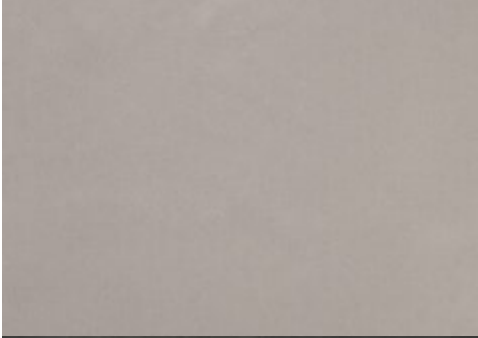

GEO

\$0.00

- [Description](#)
- [Additional information](#)

STOCKED IN LINCOLN, NE

AVAILABLE COLORS

Blanco
Carrara
Gris
Negro

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

RECOMMENDED INSTALLATIONS

Wall
Floor
Exterior

SHARE THIS STYLE



[GENERATE PDF](#)

ADDITIONAL INFORMATION

Color	Brown, Gray, Black, White
Material	Wood, Stone, Concrete, Decorative, 3D Wall
Material	Concrete , Decorative
Finish	Glossy , Matte
Price	\$\$\$

Geo quantity

Add to cart

SKU: Geo

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

GEO AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carlton	Pieces/Box	Recommended Grout Joint
7x8 (Blanco, Carrara, Gris)	Porcelain	Hexagon	Matte	3/8"	11	35	Min. 5/64"
3.6x8.2 (Gris, Negro, Blanco)	Porcelain	Chevron	Matte	3/8"	11	54	Min. 5/64"
3.6x8.2 (Blanco)	Porcelain	Chevron	Glossy	3/8"	11	54	Min. 5/64"

GEO HEXAGON TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥ 0.42
Water Absorption	ISO 10545-3	< .05%
Breaking Strength	ISO 10545-4	> 1300 N
MOH's Hardness	EN 0	7
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA
Stain Resistance	ISO 10545-14	5

GEO CHEVRON MATTE TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥ 0.42
Water Absorption	ISO 10545-3	< 0.5%
Breaking Strength	ISO 10545-4	> 1300 N
MOH's Hardness	EN 0	7
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA
Stain Resistance	ISO 10545-14	5

GEO CHEVRON GLOSSY TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Water Absorption	ISO 10545-3	> 10%
Breaking Strength	ISO 10545-4	> 600 N
MOH's Hardness	EN 0	3
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GHB GA
Stain Resistance	ISO 10545-14	5

RELATED PRODUCTS



TIMBER

\$0.00



CREFOR

\$0.00



CEMENTONIA

\$0.00