




## SARKOTILE

### INDUSTRIAL CHIC MODERN AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Rectified	Matte	3/8"	13.56	7	
3x12 Bullnose	Porcelain		Matte	3/8"		20	
18x36	Porcelain	Rectified	Matte	3/8"	13.08	3	

### INDUSTRIAL CHIC MODERN TILE PERFORMANCE DATA

Physical Properties	ASTM Test	ISO Test	Value Required ANSI	Declared ASTM
Water Absorption	C373	ISO-10545/3	<=0.5%	<=0.1%
Break Strength	C648	ISO-10545/4	>=250	Min. 350
Scratch Hardness	MOH's Scale	EN-101	-	7
Chemical Resistance	C650	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	C1026	ISO-10545/12	Resistant	Resistant
Group	SEE FAQs	SEE FAQs	-	4
Deep Abrasion - Unglazed Tiles	C1234	ISO-10545/6	<175 mm <sup>3</sup>	Pass
PEI - Glazed Tiles	C1027	ISO-10545/7	-	-
Minimum Bond Strength (PSI)	C482		>=50 psi	165
Dynamic Coefficient of Friction (DCOF)	A137.1	-	>=0.42	>=0.42
Shade and Texture Rating	CTDA "V"	-	-	V3
Facial Dimensions	C499	ISO-10545/2	1.5% Max	Pass
Range of Thickness	C499	ISO-10545/2	0.040 Max	Pass
Warpage	C485	ISO-10545/2	0.75%	Pass
Wedging	C502	ISO-10545/2	1.0% Max	Pass

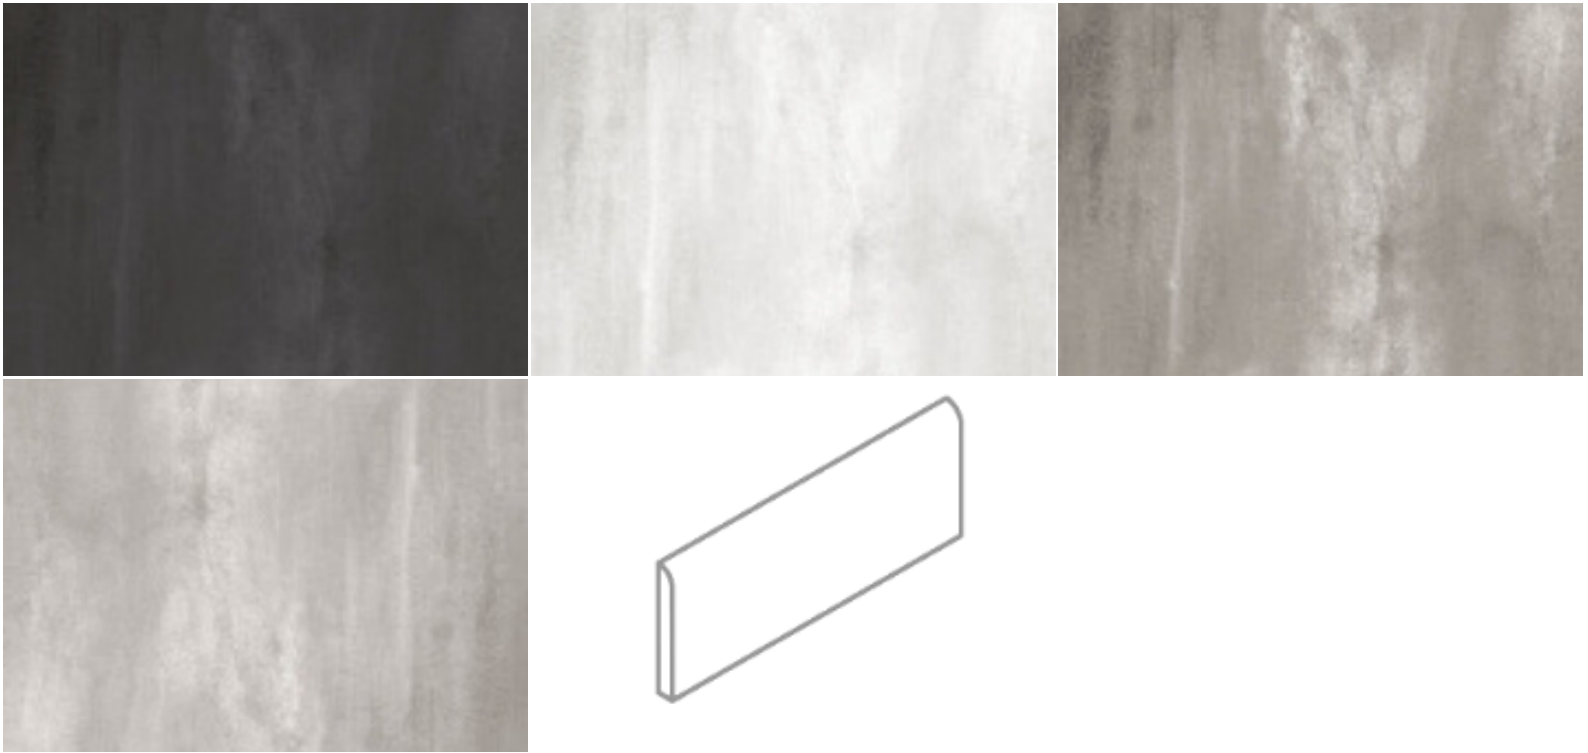

## PRODUCT DESCRIPTION

---

**1-2 WEEK LEAD TIME**

### AVAILABLE COLORS

Antracita  
Blanco  
Grafito  
Gris

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

---

### RECOMMENDED INSTALLATIONS

Floor  
Wall  
Exterior

---

### SHARE THIS STYLE

[GENERATE PDF](#)