



MADISON AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
8x63	Porcelain	Rectified	Matte	3/8"	14	4	Min. 1/16"

MADISON TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	
Water Absorption	ISO 10545-3	<0,5%
Breaking Strength	ISO 10545-4	>35N/mm2
MOH's Hardness	EN 0	MOHS 7
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GA GHA
Stain Resistance	ISO 10545-14	Class 4



PRODUCT DESCRIPTION

[Home](#) / [Porcelain & Ceramic Tile](#) / Madison



MADISON

\$0.00

- [Description](#)
- [Additional information](#)

STOCKED IN LINCOLN, NE

AVAILABLE COLORS

Ash
Maple

RECOMMENDED INSTALLATIONS

Wall
Floor
Exterior

SHARE THIS STYLE



[GENERATE PDF](#)

ADDITIONAL INFORMATION

Color	Brown, Gray, Black, White
Material	Wood, Stone, Concrete, Decorative, 3D Wall
Material	Wood
Finish	Matte
Price	\$\$

Madison quantity

Add to cart

SKU: Madison

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

MADISON AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
8x63	Porcelain	Rectified	Matte	3/8"	14	4	Min. 1/16"

MADISON TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	
Water Absorption	ISO 10545-3	<0,5%
Breaking Strength	ISO 10545-4	>35N/mm2
MOH's Hardness	EN 0	MOHS 7
Chemical Resistance (Acid & Bases)	ISO 10545-13	GLA GA
Stain Resistance (Household Chemicals)	ISO 10545-14	GHA Class 4

RELATED PRODUCTS




BI'MAN

\$0.00



CARBONITE

\$0.00

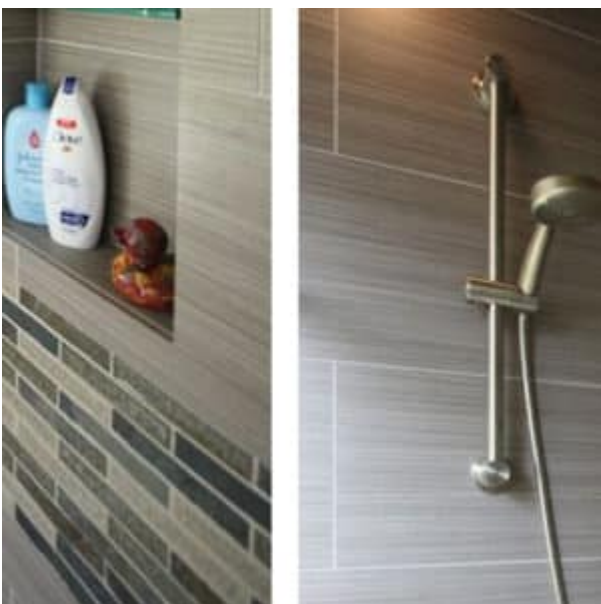

SILK

\$0.00