






## SARKOTILE

### STATELY AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Non-Rectified	Matte	3/8"	15.49	8	
12x12	Porcelain	Mosaic 2x2	Matte	3/8"	9.69	10	
3x24	Porcelain		Matte	3/8"			

### STATELY TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥ 0.42
Water Absorption	ANSI A137.1	≤ 0.5%
Resistance to freeze/thaw cycling	ASTM C1026	Resistant
Warpage (diagonal)	Warpage ± 0.4% or ± 0.07 in.	Comply with ANSI A137.1
Warpage (edge)	Warpage ± 0.4% or ± 0.05 in.	Comply with ANSI A137.1
Chemical Resistance (Acid & Bases) (Household Chemicals)	ASTM C650	Unaffected
Thickness	ASTM C499	Comply with ANSI A137.1
Wedging	± 0.25% or ± 0.03 in	Comply with ANSI A137.1

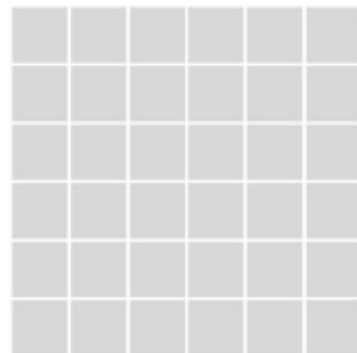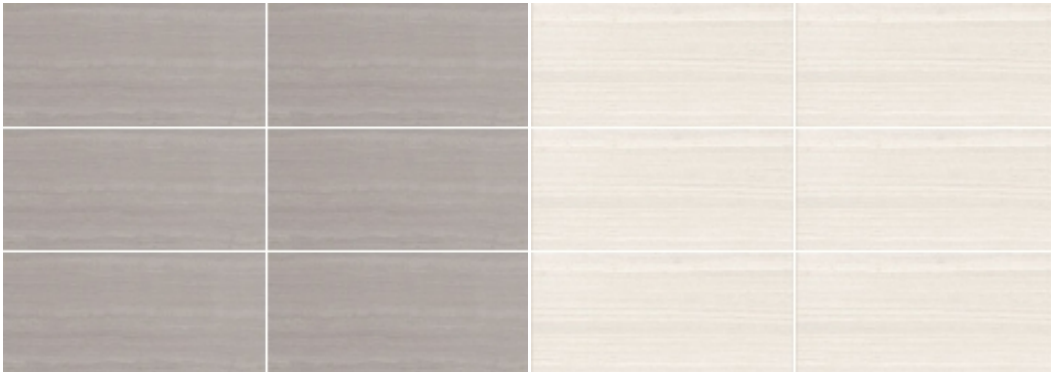

## PRODUCT DESCRIPTION

---

**1-2 WEEK LEAD TIME**

**AVAILABLE COLORS**

Platinum

White

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

---

**RECOMMENDED INSTALLATIONS**

Wall

Floor

Exterior

---

**SHARE THIS STYLE**

[GENERATE PDF](#)