



## STONWORKS AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Rectified	Matte		13.56	7	
12x24	Porcelain	Rectified	Glossy		13.11	7	
24x24	Porcelain	Rectified	Matte		11.64	3	
24x24	Porcelain	Rectified	Glossy		11.24	3	
24x48	Porcelain		Matte				
3x24 Bullnose	Porcelain		Matte			10	
6x12 Covebase	Porcelain		Matte			20	
12x12	Porcelain	Mosaic 2x6 Brickset	Matte		9.69	10	
12x12	Porcelain	Mosaic Basketweave Mosaic	Matte		9.69	10	
10x12	Porcelain	Mosaic Hex	Matte		8.07	10	
10x12	Porcelain	Mosaic Hex	Glossy		8.07	10	
12x12	Porcelain	Mosaic 2x2	Glossy			10	
1.2x24	Porcelain	Decorative Accent	Matte			6	
1.8x24	Porcelain	Decorative Accent	Matte			4	
1.88x24	Porcelain	Rectified	Glossy			10	
1.88x1.88	Porcelain	Dot	Glossy			70	


## STONWORKS MATTE TILE PERFORMANCE DATA

Physical Properties	Test ASTM	North American Standard A137.1	Results
Water Absorption	C373	≤0.5%	Comply with ANSI A137.1
DCOF Average Dynamic Coefficient of Friction	BOT 3000 test	≥0.42	≥0.42
Resistance to freeze/thaw cycling	C1026	As reported	Resistant
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	Comply with ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	Comply with ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	Comply with ANSI A137.1
Chemical Resistance	C650	As reported	Unaffected

Breaking Strength	C648	250 lbf or greater	Comply with ANSI A137.1
Thickness	C499	Range: 0.04 in	Comply with ANSI A137.1

## STONWORKS GLOSSY TILE PERFORMANCE DATA

Physical Properties	Test ASTM	North American Standard A137.1	Results
Water Absorption	C373	≤0.5%	Comply with ANSI A137.1
DCOF Average Dynamic Coefficient of Friction	BOT 3000 test	≥0.42	<0.42
Resistance to freeze/thaw cycling	C1026	As reported	Resistant
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	Comply with ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	Comply with ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	Comply with ANSI A137.1
Chemical Resistance	C650	As reported	Unaffected
Breaking Strength	C648	250 lbf or greater	Comply with ANSI A137.1
Thickness	C499	Range: 0.04 in	Comply with ANSI A137.1

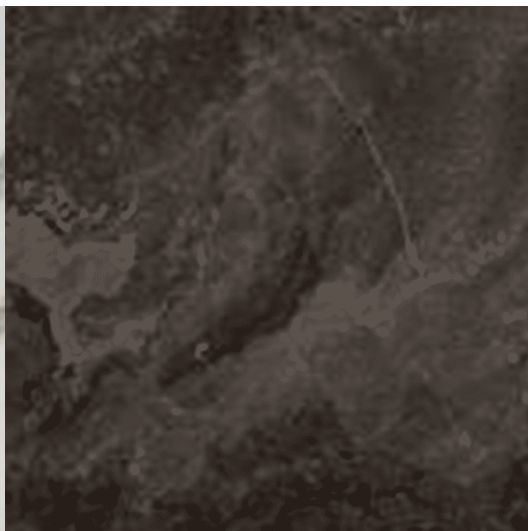


# PRODUCT DESCRIPTION

---





[Home](#) / [Porcelain & Ceramic Tile](#) / Stoneworks








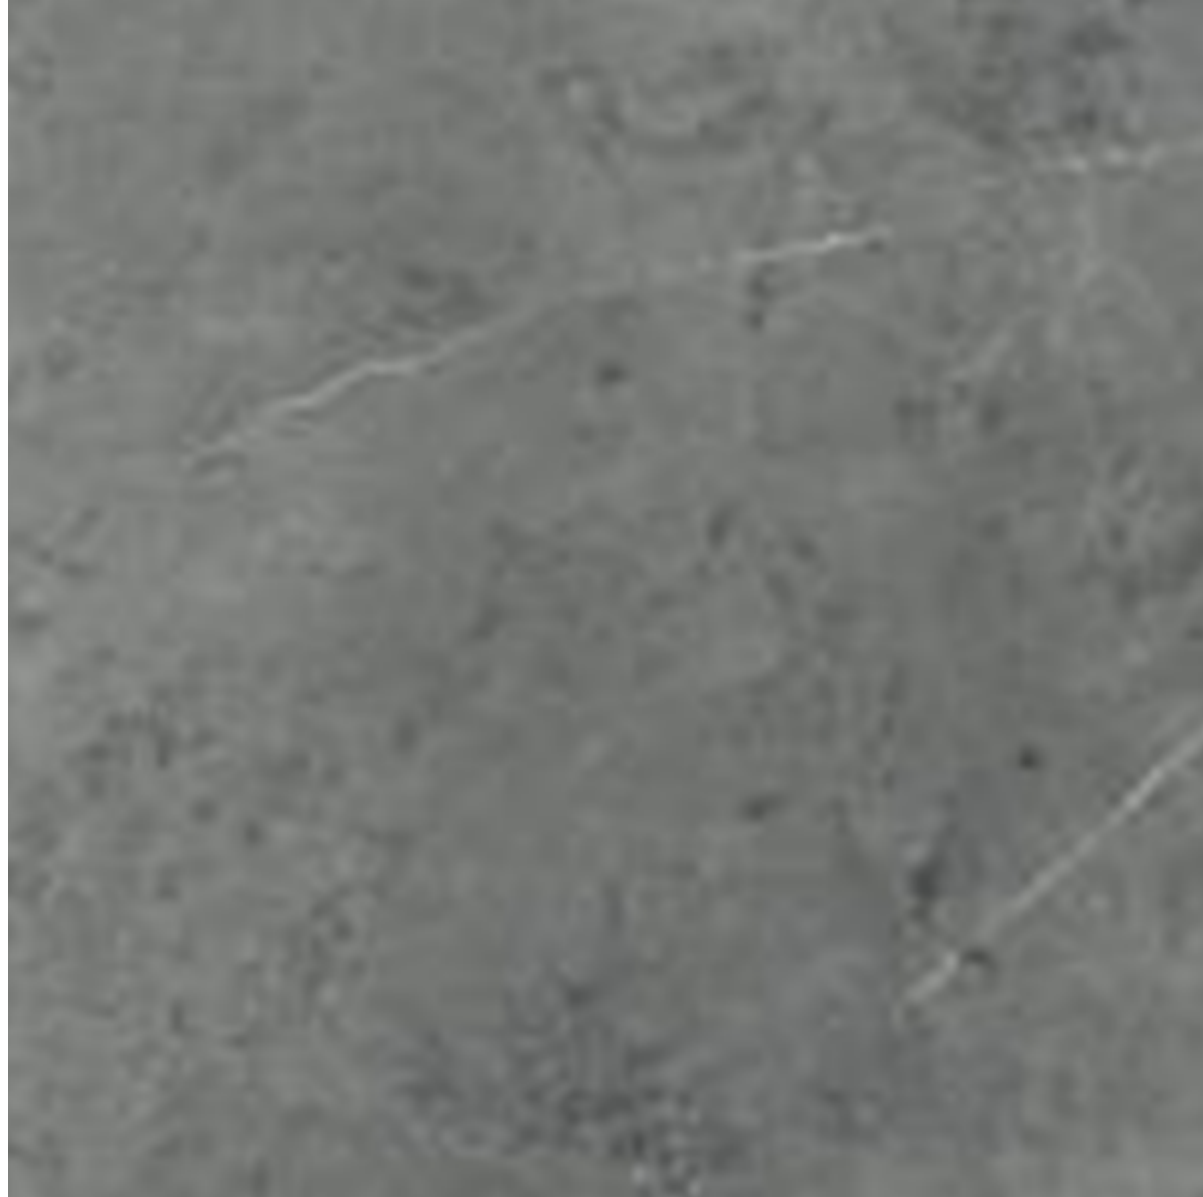



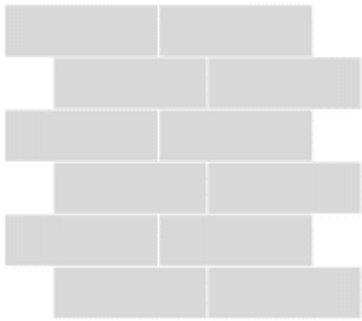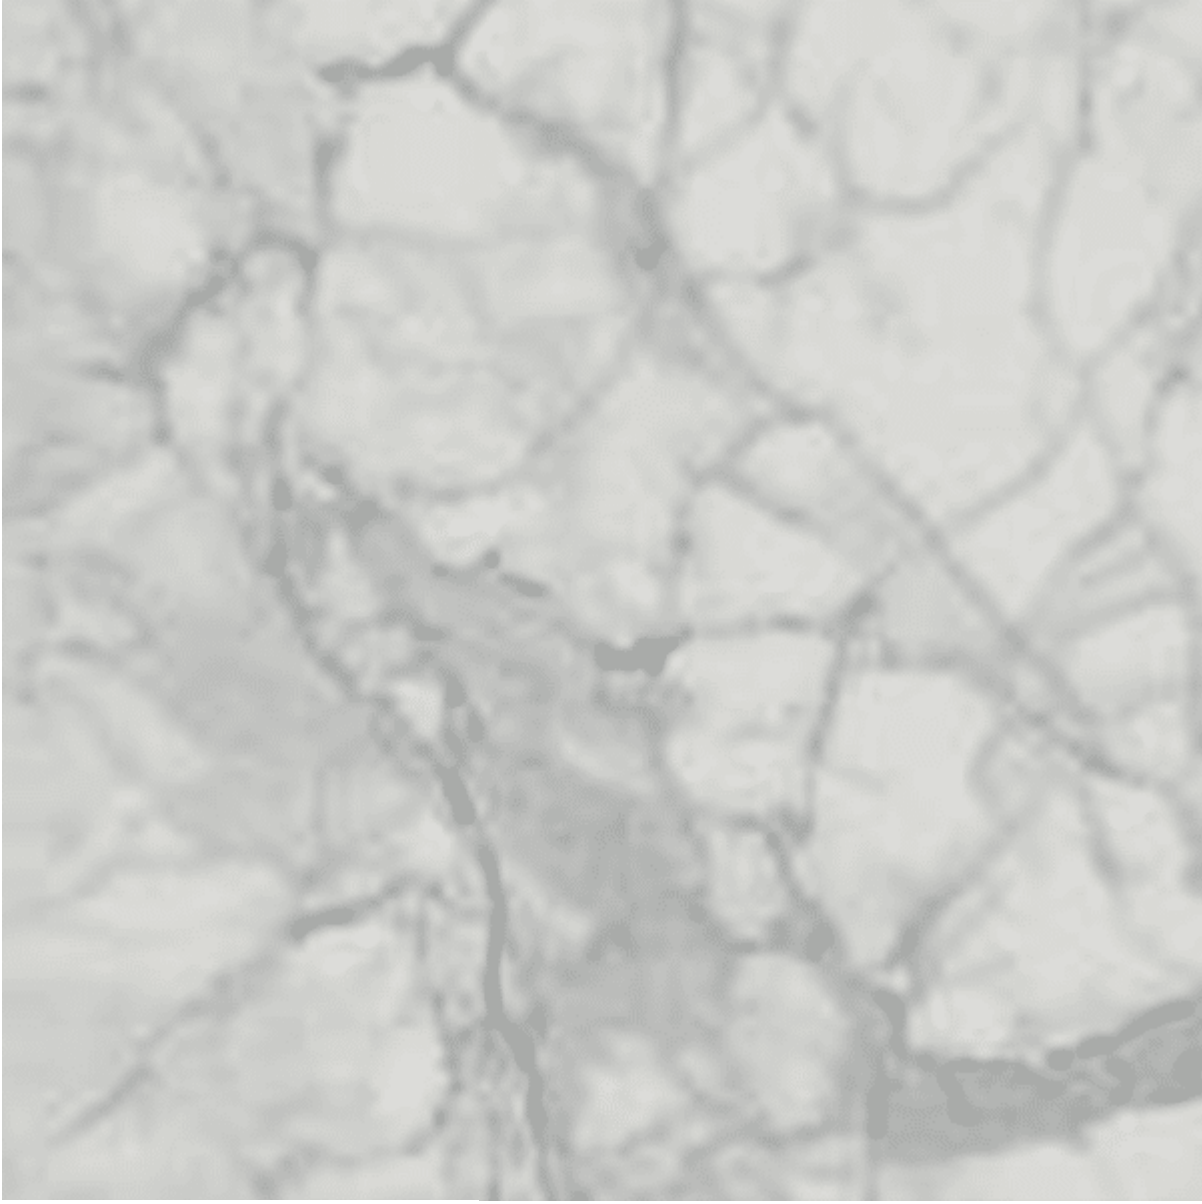

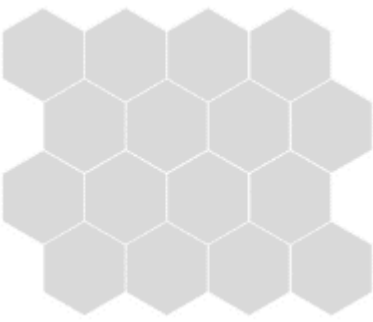

## STONWORKS

\$0.00

- [Description](#)
- [Additional information](#)

1-2 WEEK LEAD TIME

### AVAILABLE COLORS

Calacatta  
Frappuccino  
Graphite  
Statuario

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

---

### RECOMMENDED INSTALLATIONS

Floor  
Wall  
Exterior

---

### SHARE THIS STYLE



## ADDITIONAL INFORMATION

<b>Color</b>	<a href="#">Brown</a> , <a href="#">Grey</a> , <a href="#">White</a>
<b>Material</b>	<a href="#">Stone</a>
<b>Finish</b>	<a href="#">Glossy</a> , <a href="#">Matte</a>
<b>Price</b>	\$

Stoneworks quantity

[Add to cart](#)

SKU: stoneworks

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

## STONEWORKS AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain Rectified		Matte		13.56	7	
12x24	Porcelain Rectified		Glossy		13.11	7	
24x24	Porcelain Rectified		Matte		11.64	3	
24x24	Porcelain Rectified		Glossy		11.24	3	
24x48	Porcelain		Matte				
3x24 Bullnose	Porcelain		Matte			10	
6x12 Covebase	Porcelain		Matte			20	
12x12	Porcelain Mosaic 2x6 Brickset		Matte	9.69		10	
12x12	Porcelain Mosaic Basketweave Mosaic		Matte	9.69		10	
10x12	Porcelain Mosaic Hex		Matte	8.07		10	
10x12	Porcelain Mosaic Hex		Glossy	8.07		10	
12x12	Porcelain Mosaic 2x2		Glossy			10	
1.2x24	Porcelain Decorative Accent		Matte			6	
1.8x24	Porcelain Decorative Accent		Matte			4	
1.88x24	Porcelain Rectified		Glossy			10	
1.88x1.88	Porcelain Dot		Glossy			70	

## STONEWORKS MATTE TILE PERFORMANCE DATA

Physical Properties	Test ASTM	North American Standard A137.1	Results
Water Absorption	C373	≤0.5%	Comply with ANSI A137.1
DCOF Average Dynamic Coefficient of Friction	BOT 3000 test	≥0.42	≥0.42
Resistance to freeze/thaw cycling	C1026	As reported	Resistant
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	Comply with ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	Comply with ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	Comply with ANSI A137.1
Chemical Resistance	C650	As reported	Unaffected
Breaking Strength	C648	250 lbf or greater	Comply with ANSI A137.1
Thickness	C499	Range: 0.04 in	Comply with ANSI A137.1



# STONEWORKS GLOSSY TILE PERFORMANCE DATA

Physical Properties	Test ASTM	North American Standard A137.1	Results
Water Absorption	C373	≤0.5%	Comply with ANSI A137.1
DCOF Average Dynamic Coefficient of Friction	BOT 3000 test	≥0.42	<0.42
Resistance to freeze/thaw cycling	C1026	As reported	Resistant
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	Comply with ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	Comply with ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	Comply with ANSI A137.1
Chemical Resistance	C650	As reported	Unaffected
Breaking Strength	C648	250 lbf or greater	Comply with ANSI A137.1
Thickness	C499	Range: 0.04 in	Comply with ANSI A137.1

## RELATED PRODUCTS



### CEMENTONIA

\$0.00



### PULPIS

\$0.00



## **CARBONITE**

\$0.00