



TAPESTRY AVAILABLE SIZES


Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Rectified	Matte		13.56	7	
6x24	Porcelain	Rectified	Matte		3.88	4	
0.8x24	Porcelain	Rectified	Matte			10	
0.8x0.8	Porcelain	Rectified	Matte				
6x12 Covebase	Porcelain	Rectified	Matte			20	


TAPESTRY TILE PERFORMANCE DATA

Physical Properties	Test ASTM	North American Standard A137.1	Results
Water Absorption	C373	$\leq 0.5\%$	Comply with ANSI A137.1
DCOF Average Dynamic Coefficient of Friction	BOT 3000 test	≥ 0.42	≥ 0.42
Resistance to freeze/thaw cycling	C1026	As reported	Resistant
Warpage (edge)	C485	Warpage $\pm 0.4\%$ or ± 0.05 in	Comply with ANSI A137.1
Warpage (diagonal)	C485	Warpage $\pm 0.4\%$ or ± 0.07 in	Comply with ANSI A137.1
Wedging	C502	$\pm 0.25\%$ or ± 0.03 in	Comply with ANSI A137.1
Chemical Resistance	C650	As reported	Unaffected
Breaking Strength	C648	250 lbf or greater	Comply with ANSI A137.1
Thickness	C499	Range: 0.04 in	Comply with ANSI A137.1

PRODUCT DESCRIPTION

[Home](#) / [Porcelain & Ceramic Tile](#) / [Tapestry](#)

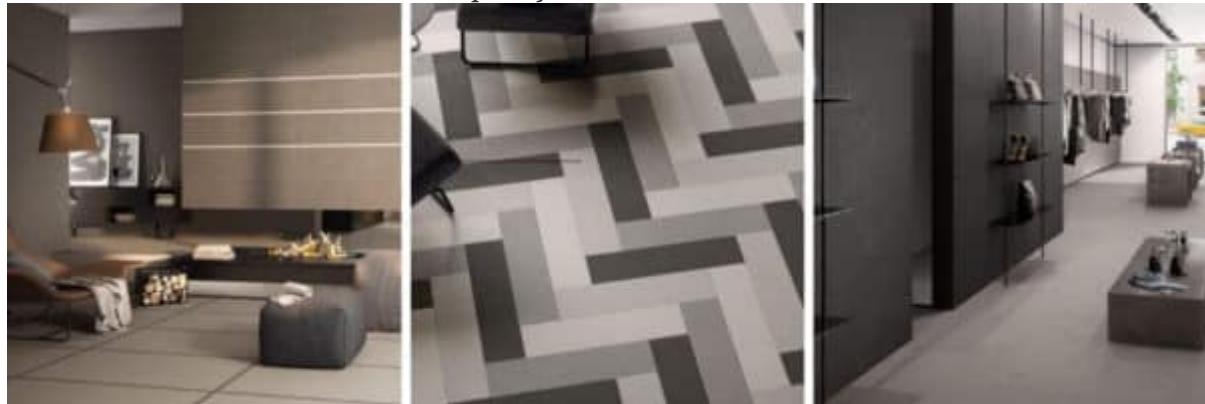



TAPESTRY

\$0.00

- [Description](#)
- [Additional information](#)

1-2 WEEK LEAD TIME

AVAILABLE COLORS

Coffee
Dark

Grey
Ivory
Silver
White

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

RECOMMENDED INSTALLATIONS

Floor
Wall
Exterior

SHARE THIS STYLE



[GENERATE PDF](#)

ADDITIONAL INFORMATION

Material	Fabric
Finish	Matte
Price	\$

Tapestry quantity

Add to cart

SKU: tapestry

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

TAPESTRY AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24			Porcelain Rectified Matte		13.56	7	
6x24			Porcelain Rectified Matte		3.88	4	
0.8x24			Porcelain Rectified Matte			10	
0.8x0.8			Porcelain Rectified Matte				
6x12 Covebase			Porcelain Rectified Matte			20	

TAPESTRY TILE PERFORMANCE DATA

Physical Properties	Test ASTM	North American Standard A137.1	Results
Water Absorption	C373	$\leq 0.5\%$	Comply with ANSI A137.1
DCOF Average Dynamic Coefficient of Friction	BOT 3000 test	≥ 0.42	≥ 0.42
Resistance to freeze/thaw cycling	C1026	As reported	Resistant
Warpage (edge)	C485	Warpage $\pm 0.4\%$ or ± 0.05 in	Comply with ANSI A137.1
Warpage (diagonal)	C485	Warpage $\pm 0.4\%$ or ± 0.07 in	Comply with ANSI A137.1
Wedging	C502	$\pm 0.25\%$ or ± 0.03 in	Comply with ANSI A137.1
Chemical Resistance	C650	As reported	Unaffected

Physical Properties**Test ASTM****North American Standard A137.1****Results**

Breaking Strength

C648

250 lbf or greater

Comply with ANSI A137.1

Thickness

C499

Range: 0.04 in

Comply with ANSI A137.1

RELATED PRODUCTS



CARBONITE

\$0.00



BEACHWOOD

\$0.00



TIMBER

\$0.00