




TIMBER AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
6x36	Porcelain	Rectified	Matte	7/16"	12	8	Min. 1/8"

TIMBER TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	D.C.O.F. ≥ 0.42
Water Absorption	ISO 10545-3	E ≤ 0.09%
Breaking Strength	ISO 10545-4	Complaint
MOH's Hardness	EN 0	
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GA
Stain Resistance	ISO 10545-14	Class 5

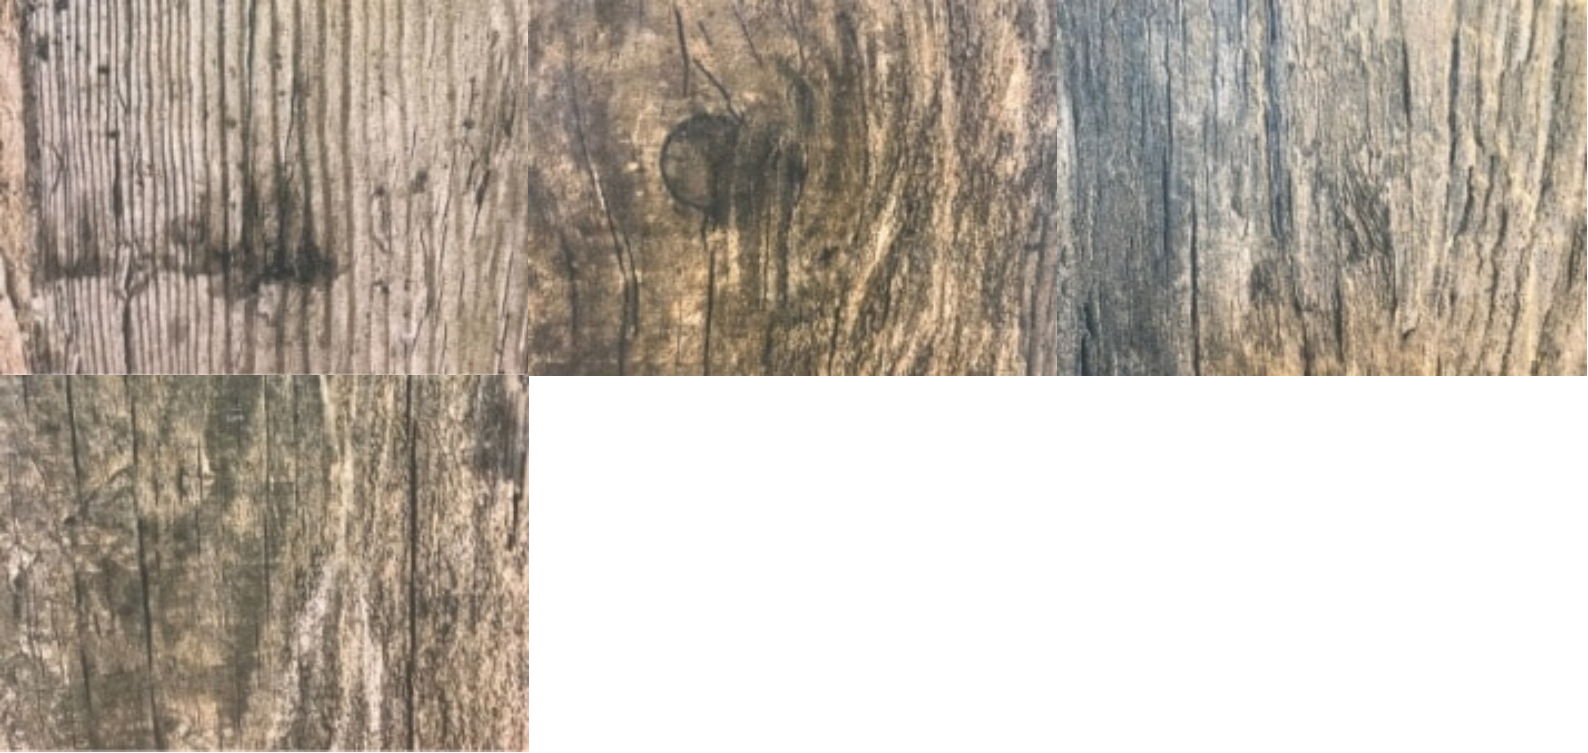

PRODUCT DESCRIPTION

[Home](#) / [Porcelain & Ceramic Tile](#) / Timber





TIMBER

\$0.00

- [Description](#)
- [Additional information](#)

STOCKED IN LINCOLN, NE

AVAILABLE COLORS

Dorado
Noche
Oyster
Salvia

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

RECOMMENDED INSTALLATIONS

Floor
Wall
Exterior

SHARE THIS STYLE



[GENERATE PDF](#)

ADDITIONAL INFORMATION

Color	Brown
Material	Wood
Finish	Matte
Price	\$

Timber quantity

1

Add to cart

SKU: timber

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

TIMBER AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
6x36	Porcelain	Rectified	Matte	7/16"	12	8	Min. 1/8"

TIMBER TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	D.C.O.F. ≥ 0.42
Water Absorption	ISO 10545-3	E ≤ 0.09%
Breaking Strength	ISO 10545-4	Complaint
MOH's Hardness	EN 0	
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GA
Stain Resistance	ISO 10545-14	Class 5

RELATED PRODUCTS



CORK

\$0.00



BEACHWOOD

\$0.00



BI'MAN

\$0.00