



SARKOTILE


VINTAGE AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
3x6	Ceramic	Non-Rectified		5/16"	10	80	
4x10	Ceramic	Non-Rectified		5/16"	11.25	38	
3x12 Crackle	Ceramic	Non-Rectified		5/16"	5.38	22	
4x10 Deco (Aqua, Biscuit, Tender Gray & White)	Ceramic	Non-Rectified		5/16"	11.25	38	
7x8 Hexagon	Ceramic	Non-Rectified		5/16"	10.76	37	

VINTAGE TILE PERFORMANCE DATA

Physical Properties	ASTM Test	ISO Test	Value Required ANSI	Declared ASTM
Water Absorption	C373	ISO-10545/3	7.0% < wa <=20%	>10%
Break Strength	C648	ISO-10545/4	>=250	Meets or Exceeds
Scratch Resistance	MOH's Scale	EN-101	-	N/A
Chemical Resistance	C650	ISO-10545/13	Unaffected	Unaffected
Shade and Texture Rating	CTDA "V"	-	-	V2
Warpage	C485	ISO-10545/2	0.0075	Pass
Wedging	C502	ISO-10545/2	1.0% Max	Pass



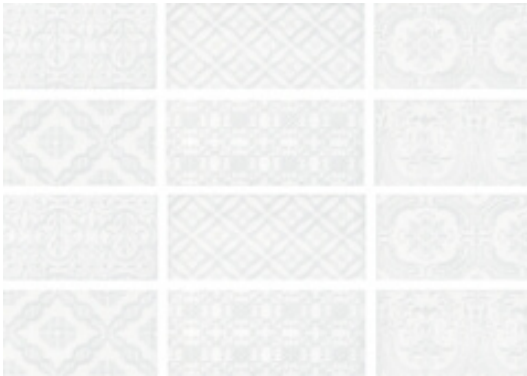

PRODUCT DESCRIPTION

1-2 WEEK LEAD TIME

AVAILABLE COLORS

Aqua
Aqua Crackle
Aqua Deco
Biscuit
Biscuit Crackle
Biscuit Deco
Blue Steel
Blue Steel Crackle
Blue Steel Deco
Taupe
Taupe Crackle
Tender Gray
Tender Gray Crackle
Tender Gray Deco
White
White Crackle
White Deco

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

RECOMMENDED INSTALLATIONS

Wall

SHARE THIS STYLE

[GENERATE PDF](#)