



VULSINI AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Rectified	Matte	3/8"	14	7	Min. 1/16"


VULSINI TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥0.42
Water Absorption	ISO 10545-3	E<0.5%
Breaking Strength	ISO 10545-4	> 1600 N
MOH's Hardness	EN 0	8
Chemical Resistance (Acid & Bases) (Household Chemicals)	ISO 10545-13	GLA GA
Stain Resistance	ISO 15045-14	3



PRODUCT DESCRIPTION

[Home](#) / [Porcelain & Ceramic Tile](#) / Vulsini

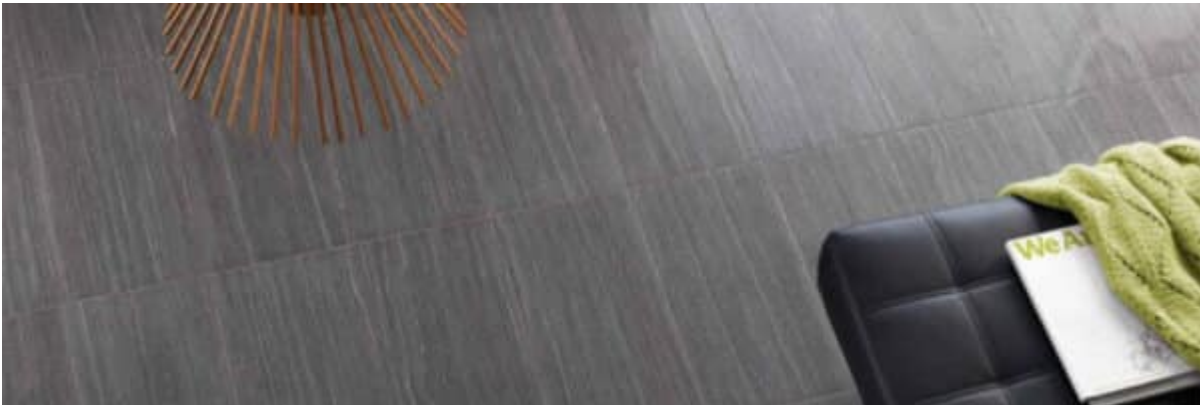

VULSINI

\$0.00

- [Description](#)

- [Additional information](#)

STOCKED IN LINCOLN, NE

AVAILABLE COLORS

Bianco
Grigio
Nero

Please contact the office for availability. [402-475-1300](tel:402-475-1300)

RECOMMENDED INSTALLATIONS

Wall
Floor
Exterior

SHARE THIS STYLE



[GENERATE PDF](#)

ADDITIONAL INFORMATION

Color	Gray, White
Material	Wood, Stone, Concrete, Decorative, 3D Wall
Material	Stone
Finish	Matte
Price	\$

Vulsini quantity

Add to cart

SKU: vulsini

Categories: [Porcelain & Ceramic Tile](#), [Trade Professionals](#)

VULSINI AVAILABLE SIZES

Sizes	Type	Style	Finish	Thickness	Sqft/Carton	Pieces/Box	Recommended Grout Joint
12x24	Porcelain	Rectified	Matte	3/8"	14	7	Min. 1/16"

VULSINI TILE PERFORMANCE DATA

Physical Properties	Standard	Results
Dynamic Coefficient of Friction	D.C.O.F. > 0.42	≥0.42
Water Absorption	ISO 10545-3	E<0.5%
Breaking Strength	ISO 10545-4	> 1600 N
MOH's Hardness	EN 0	8

Physical Properties

Standard

Results

Chemical Resistance
(Acid & Bases)
(Household Chemicals)
Stain Resistance

ISO 10545-13

GLA
GA

ISO 15045-14

3

RELATED PRODUCTS



CREFOR

\$0.00



CARBONITE

\$0.00



• **SARK STEEL**

\$0.00